

(12) UK Patent Application (19) GB (11) 2 347 601 (13) A

(43) Date of A Publication 06.09.2000

(21) Application No 9920894.4

(22) Date of Filing 03.09.1999

(30) Priority Data

(31) 9819239

(32) 03.09.1998

(33) GB

(31) 9820564

(32) 21.09.1998

(71) Applicant(s)

Nor Web DPL Limited
(Incorporated in the United Kingdom)
Regus Building, 268 Bath Road, SLOUGH, Berkshire,
SL1 4DX, United Kingdom

(72) Inventor(s)

Paul Anthony Brown
John Dickinson

(74) Agent and/or Address for Service

Mewburn Ellis
York House, 23 Kingsway, LONDON, WC2B 6HP,
United Kingdom

(51) INT CL⁷

H04B 3/56

(52) UK CL (Edition R)

H4R RTC

(56) Documents Cited

GB 2313723 A

GB 2304013 A

US 5777769 A

US 4369416 A

(58) Field of Search

UK CL (Edition Q) H2H HAA HAPD , H4R RTC

INT CL⁶ H02J , H04B

On-line: EPODOC, JAPIO, WPI

(54) Abstract Title

Communications apparatus with mains filter

(57) A low pass filter 23 is attached to separate items of equipment, for example a fuse carrier/cut-out 22/21 and an electricity meter 24: the filter allows mains to pass and blocks communications signals. The filter may be incorporated in a sealed anti-tamper unit as shown or may alternatively be accommodated in the meter, a circuit breaker or a consumer distribution unit.

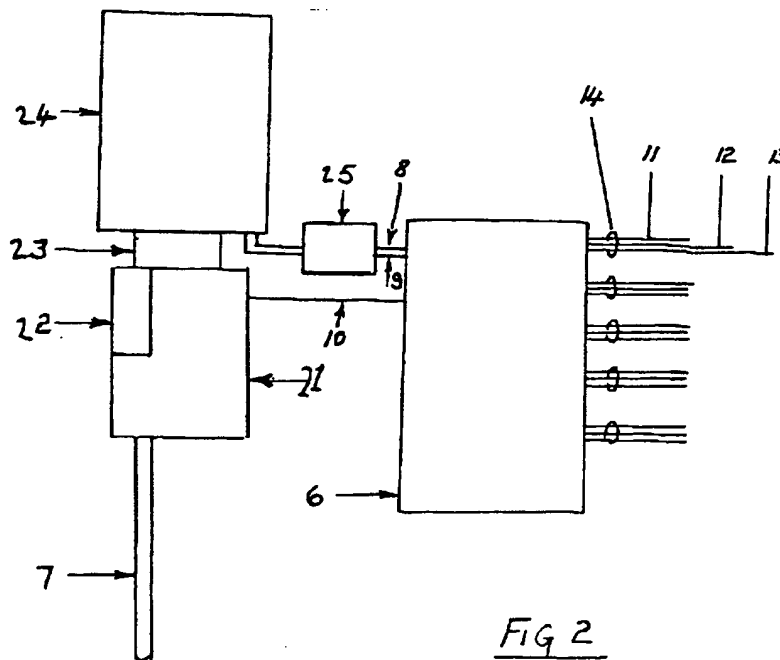
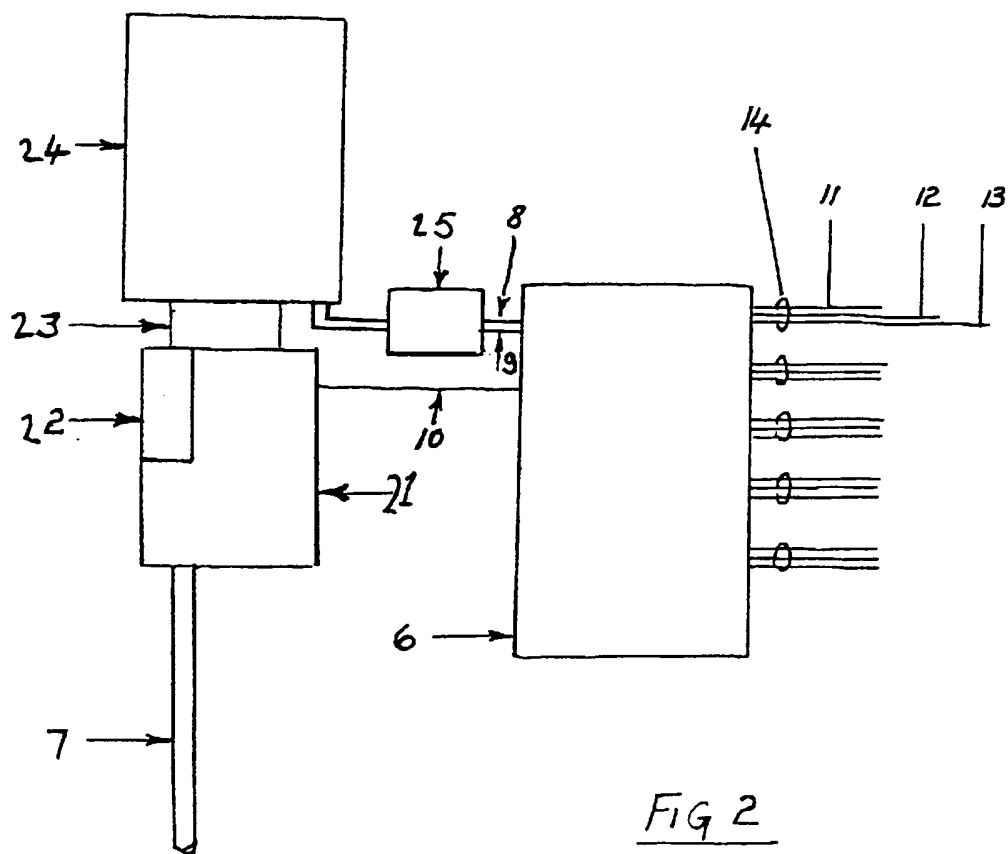
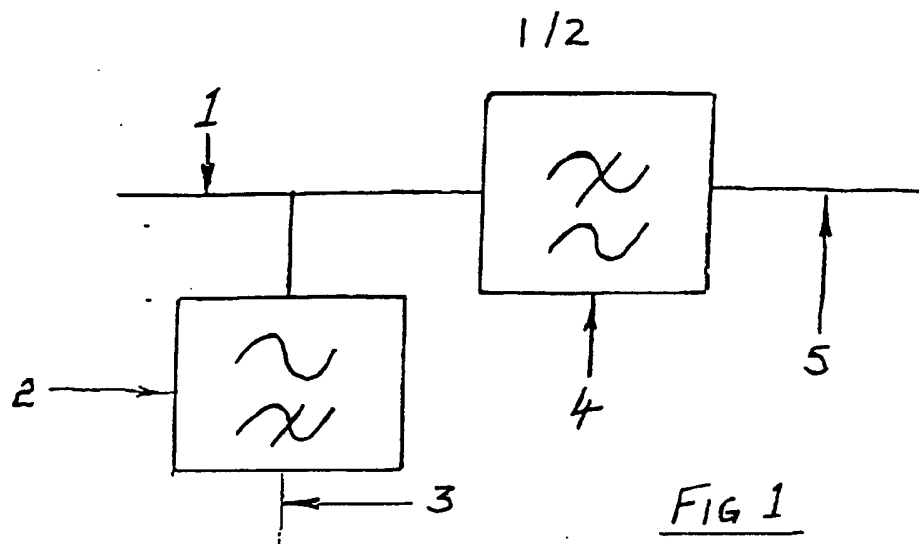


FIG 2

GB 2 347 601 A



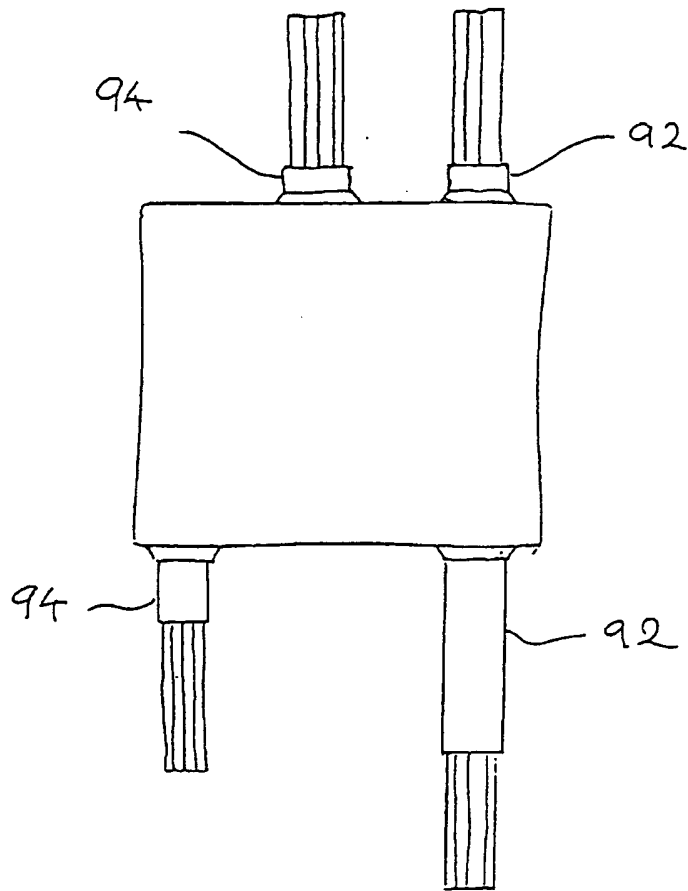


Fig 3

F I L T E R

The present invention relates to the propagation of
5 telecommunication signals over what is generally termed
a "mains" electricity network i.e. a power transmission
and/or distribution network. In particular, the present
invention relates to a filter for preventing unwanted
telecommunication signals from entering or leaving
10 consumers premises connected to the network or other
selected areas of or connected to the network.

The applicant has previously described inventions
relating to this area in published patent applications;
15 WO94/09572, WOP95/29536, WO95/29537, WO96/07245,
WO98/19398 the disclosures of which are incorporated
herein by reference. In particular, the applicant has
previously described the use of a "conditioning unit"
which, in one of its simplest forms, is suitably
20 connected high and low pass filters which, when connected
to the network, in one example the low pass filter acts
to prevent high frequency telecommunication signals from
entering a consumers premises and the high pass filter
allows the high frequency telecommunication signals to be
25 input onto and received from the network. Typically,
these two filter components are combined in a single
unit, called the "conditioning unit", as described in

WO94/09572.

The cost of producing such a conditioning unit may in some circumstances be high and therefore if it is desired
5 to equip a large number of, for example, customers premises the overall cost could be substantial. The present invention aims to provide a simpler unit which can help to reduce costs.

10 Accordingly, in a first aspect, the present invention provides communications apparatus for use with an electricity distribution and/or power transmission network, including a low pass filter portion for allowing, in use, a low frequency mains electricity power
15 signal to pass from the network and a coupling element for input and/or removal of a telecommunication signal from the network wherein the low pass filter portion and the coupling element are located in or are attached to respectively separate items of equipment.

20 By distributing the high and low pass filter elements (i.e. the coupling element and the low pass filter portion) in this way it is possible to include the elements within existing items of utility and/or customer
25 electricity distribution network equipment thereby reducing costs.

There may be more than one low pass filter portion and preferably the low pass filter portion(s) are located in one or more elements of the equipment used to connect a consumers premises electricity network to the mains
5 electricity network.

Suitable items of equipment in which the high pass filter (coupling element) could be incorporated are any or all of: an electricity meter; a circuit breaker; a consumers
10 distribution unit; and an anti-tamper block or device.

In a further aspect, the present invention provides apparatus for connecting a consumers premises electricity network to a mains electricity network in which at least
15 one component of the apparatus includes a low pass filter for allowing, in use, low frequency mains electricity signals to pass from the mains electricity network to the consumers network. The item of equipment may preferably be one or more of; an anti-tamper block, and an
20 electricity meter, a circuit breaker, or a consumers distribution unit. Preferably, the item of equipment does not also include any coupling unit for coupling telecommunication signals to/from the network.

25 In a further aspect, the present invention provides the incorporation into an item of equipment to be connected to a mains electricity network of a low pass filter

portion (preferably without any other e.g. high pass filter element) in order to prevent or reduce, in use, high frequency telecommunication signals from entering the item of equipment. The item of equipment may be an
5 item of street furniture such as a cable TV cabinet or a street light.

As is well known to those in the electricity supply industry, some consumers will go to great lengths to
10 obtain electricity without paying for it, often with little regard for their personal safety. It is known for consumers to try to make a connection onto cables extending between their consumer cut-out and the meter. In an attempt to prevent such practices, it is common to
15 provide an anti-tamper block. This is conventionally nothing more than a block of strong material against which the meter and the consumer cut-out abut, and through which the cables pass to provide a physical barrier preventing access to the cables.

20

In some circumstances, there may be a requirement to provide a low-pass filter to isolate a consumer's power supply from communication signals. The present inventor has realised that the anti-tamper block can provide a
25 convenient location for such a low-pass filter.

In another of its aspects, the invention provides an anti-tamper block for an electrical supply installation, the anti-tamper block comprising conductors projecting from the block for carrying electrical power supply current there being a filter enclosed within the block for inhibiting passage of communications signals in the conductors.

This aspect of the invention permits installation of a low-pass filter using conventional procedures with which installation engineers are already familiar, these procedures being substantially the same as those followed to install an entirely conventional anti-tamper block.

An anti-tamper block embodying the invention preferably is constructed as a sealed unit, the filter being completely and permanently enclosed within it.

Embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Figure 1 shows a schematic diagram of a "conditioning unit" according to the prior art.

Figure 2 shows a typical UK electricity supply connection incorporating an embodiment of the present

invention.

Figure 3 shows a schematic diagram of an anti-tamper block according to an embodiment of the present invention.

Figure 1 shows a schematic diagram of a prior art conditioning unit consisting of two elements: high pass filter 2 and low pass filter 4. These two elements are typically located in a single unit. A mains electricity power network 1 is connected to a subscribers network 5 via low pass filter 4; similarly, the mains network 1 is connected to/from high frequency telecommunication signals via high pass filter 2.

15

Figure 2 shows a schematic diagram of a typical UK electricity supply termination at a customers premises. The mains electricity supply cable 7 is connected to a cut out unit 21, a part 22 of which is a high rupture capacity fuse and fuse carrier. Between the electricity meter 24 and the cut out unit 21 is an anti-tamper block 23. The meter 24 is connected via a isolation switch or circuit breaker 25 to a customers distribution unit 6. Line and neutral conductors (8 and 9) run from the meter 24 to the consumers unit 6 and an earth conductor 10 runs directly from the consumer unit 6 to the cut out unit 21. Various electricity circuits (including conductors 11,

20

25

12, 13) run from the consumers unit 6 within the consumers premises.

A low pass filter element according to the present invention may be included at any suitable point in any of the components of figure 2. Particularly suitable points might be in the anti-tamper block 21 (as shown in Figure 3), the electricity meter 24, the circuit breaker 25 or the consumers unit 6 or the various outputs (e.g. filter 14) of the consumers unit 6.

By adopting such a distributed approach to "conditioning" of the power line telecommunications network, premises that do not wish to receive telecommunication signals may still be provided with low pass filter elements, if necessary, in order to reduce conducted emissions within the premises and a result minimise the radiation from any above ground wiring within the premises. This reduces cost, as the non-telecommunication subscriber premises do not require high pass filter element (coupling element).

As shown in Figure 3, the anti-tamper block 23 may include a moulded block of tough rubber or plastic material. A pair of electrical power cables 92,94 extend through the block such that portions of the cables project from opposite faces of it. End portions of the

cables 92,94 are stripped of insulation such that they can be connected to the neutral terminal block 20 and to the second socket component 28 within the cutout, and to appropriate connection points within the meter 6 to
5 convey electrical power to the meter. The cutout 2 and the meter 6 are mounted to abut closely against the anti-tamper block to inhibit any attempt to gain unauthorised access to the cables 92,94.

10 Within the block there is contained a low-pass electrical filter (not shown) which largely blocks passage of communication signals but presents little impedance to the much lower frequency of AC mains. The filter can be of any suitable design, for example, it may be as
15 described in published UK patent application No. 2272350.

The above description is given by way of example only and modifications will be apparent to those skilled in the
20 art.

CLAIMS

1. Communications apparatus for use with an electricity
5 distribution and/or power transmission network, including
a low pass filter portion for allowing, in use, a low
frequency mains electricity power signal to pass from the
network and a coupling element for input and/or removal
10 of a telecommunication signal from the network wherein
the low pass filter portion and the coupling element are
located in or are attached to respectively separate items
of equipment.

2. Communication apparatus according to claim 1 wherein
15 the low pass filter portion and preferably the low pass
filter portion(s) are located in one or more elements of
the equipment used to connect a consumers premises
electricity network to the mains electricity network
including:

20 any or all of: an electricity meter; a circuit
breaker; a consumers distribution unit; and an anti-
tamper block or device.

3. Apparatus for connecting a consumers premises
25 electricity network to a mains electricity network in
which at least one component of the apparatus includes a
low pass filter for allowing, in use, low frequency mains

electricity signals to pass from the mains electricity network to the consumers network.

4. An anti-tamper block for an electrical supply
5 installation, the anti-tamper block comprising conductors projecting from the block for carrying electrical power supply current there being a filter enclosed within the block for inhibiting passage of communications signals in the conductors.

10

5. An anti-tamper block according to claim 4 constructed as a sealed unit, the filter being completely and permanently enclosed within it.

15 6. Communications apparatus substantially as any one embodiment herein described with reference to Figure 3 of the accompanying drawings.

7. An anti-tamper block substantially as any one
20 embodiment herein described with reference to Figure 3 of the accompanying drawings.



Application No: GB 9920894.4
Claims searched: 1 to 7

Examiner: Mr F J Fee
Date of search: 26 November 1999

Patents Act 1977
Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.Q): H2H [HAA, HAPD], H4R [RTC]

Int Cl (Ed.6): H02J, H04B

Other: On-line: EPODOC, JAPIO, WPI

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	GB 2304013 A [NORWEB] e.g. figure 8	1, 3, 4
X	GB 2313723 A [NORTHERN TELECOM]	1, 3
X	US 5777769 [COUTINHO]	1, 3
X	US 4369416 [ZAPP] column 2 lines 41 to 59 and column 3 lines 34 to 39	1, 2, 3

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.